

Liebert MicroPOD™ Maintenance Bypass for Micro-UPS Systems

When your computer system can't be without power — even for maintenance — a Liebert MicroPOD ensures continuous uptime. The MicroPOD provides maintenance bypass capability as well as power output distribution, and can be used with virtually any micro-UPS system.

The MicroPOD allows you to manually transfer your connected equipment to utility power via a maintenance bypass switch, permitting scheduled maintenance or UPS replacement without power disruption. Transferring back to UPS power is just as easy — just turn the switch to the indicated position and your load is protected by the UPS.

Available in plug and play or hard wired options at 120V or 208V rating. Includes brackets for rack mounting in any direction.


Use of the MicroPOD offers these benefits:

- Provides utility power to your attached equipment when switched to maintenance bypass mode
- Allows UPS maintenance or replacement of the UPS without discontinuing power to critical equipment
- Easily installed — the UPS and utility power are both connected to the MicroPOD with the supplied cords
- Rotary switch with indicators make the unit simple to operate



MicroPOD™ Specifications

Part Number	Plug to Utility	Receptacle to UPS Input	Plug to UPS Output	MicroPOD Output Receptacles
120V UL Listed MicroPODs				
MP2-115A	5-15P	5-15R	5-15P	(8)5-15R
MP2-120C	5-20P	5-20R	5-20P	(8)5-20R (T-Slot)
MP2-130C	L5-30P	L5-30R	L5-30P	(8)5-20R (T-Slot)
MP2-130E	L5-30P	L5-30R	L5-30P	(2)5-15R, (4) 5-20R (T-Slot) (1) L5-30R
MP2-130P	L5-30P	L5-30R	L5-30P	(4) 5-15R, (2) L5-20R
MP2-115HW	Hardwired	5-15R	5-15P	Hardwired
MP2-120HW	Hardwired	5-20R	5-20P	Hardwired
MP2-130HW	Hardwired	5-30R	5-30P	Hardwired
208V UL Listed MicroPOD				
MP2-220N	L6-20P OR Hardwire Connection (plug is removable for hardwire applications)	L6-20R	L6-20P	(2) L6-20R, (2) L6-15R, OR Hardwire Connections (receptacles are removable for hardwire applications)
230V CE Marked MicroPODs				
MP2-210K	EN60320/C14	EN60320/C13	EN60320/C14	(4) EN60320/C13
MP2-220L	EN60320/C20	EN60320/C19	EN60320/C20	(4) EN60320/C13, (1)EN60320/C19

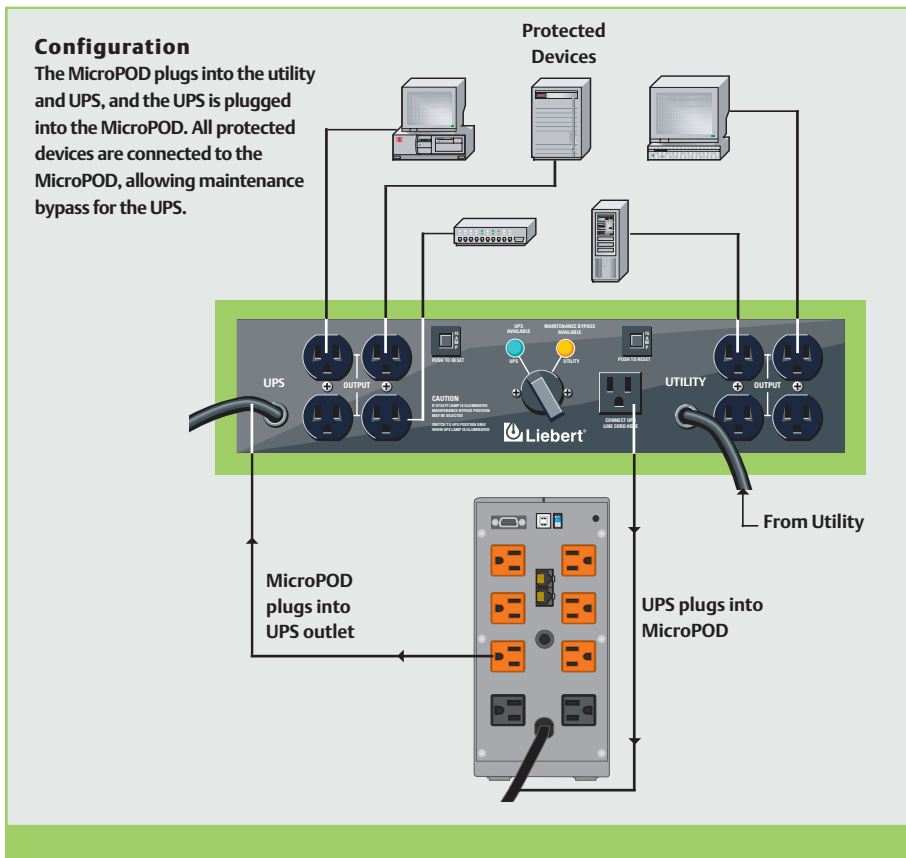

Liebert Corporation

1050 Dearborn Drive
P.O. Box 29186
Columbus, Ohio 43229
800 877 9222 Phone (U.S. &
Canada Only)
614 888 0246 Phone (Outside U.S.)
614 841 6022 FAX

Via Leonardo Da Vinci 8
Zona Industriale Tognana
35028 Piove Di Sacco (PD)
Italy
39 049 9719 111 Phone
39 049 5841 257 FAX

Emerson Network Power Asia Pacific
7/F., Dah Sing Financial Centre
108 Gloucester Rd, Wanchai
Hong Kong
852 25722201 Phone
852 28029250 FAX

liebert.com

24 x 7 Tech Support

800 222 5877 Phone
614 841 6755 (outside U.S.)

While every precaution has been taken to ensure accuracy and completeness in this literature, Liebert Corporation assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions.

© 2005 Liebert Corporation. All rights reserved throughout the world. Specifications subject to change without notice.

All names referred to are trademarks or registered trademarks of their respective owners.

© Liebert and the Liebert logo are registered trademarks of the Liebert Corporation.

SL-23800 (R3/06) Printed in USA

Emerson Network Power.
The global leader in enabling
Business-Critical Continuity.

- AC Power Systems
- Connectivity
- DC Power Systems
- Embedded Power
- Integrated Cabinet Solutions
- Outside Plant
- Power Switching & Controls
- Precision Cooling
- Services
- Site Monitoring
- Surge & Signal Protection

Emerson Network Power.com

Emerson Network Power and the Emerson Network Power logo are trademarks and service marks of Emerson Electric Co.
©2005 Emerson Electric Co.